




DATA SHEET

MARINEGEAR CPGD280

With safety according to class

Gear ratios	Torque [Nm]	J-Factor [kW/rpm]	J-Factor [HP/rpm]
5,26 : 1	13500	1,41	1,92
6,12 : 1	13500	1,41	1,92
6,74 : 1	12650	1,32	1,80
7,97 : 1	12880	1,35	1,83
8,40 : 1	11260	1,18	1,60
8,99 : 1	9630	1,01	1,37
9,89 : 1	9000	0,94	1,28
10,47 : 1	8280	0,87	1,18
11,11 : 1	7650	0,80	1,09

OTHER RATIOS AVAILABLE ON REQUEST

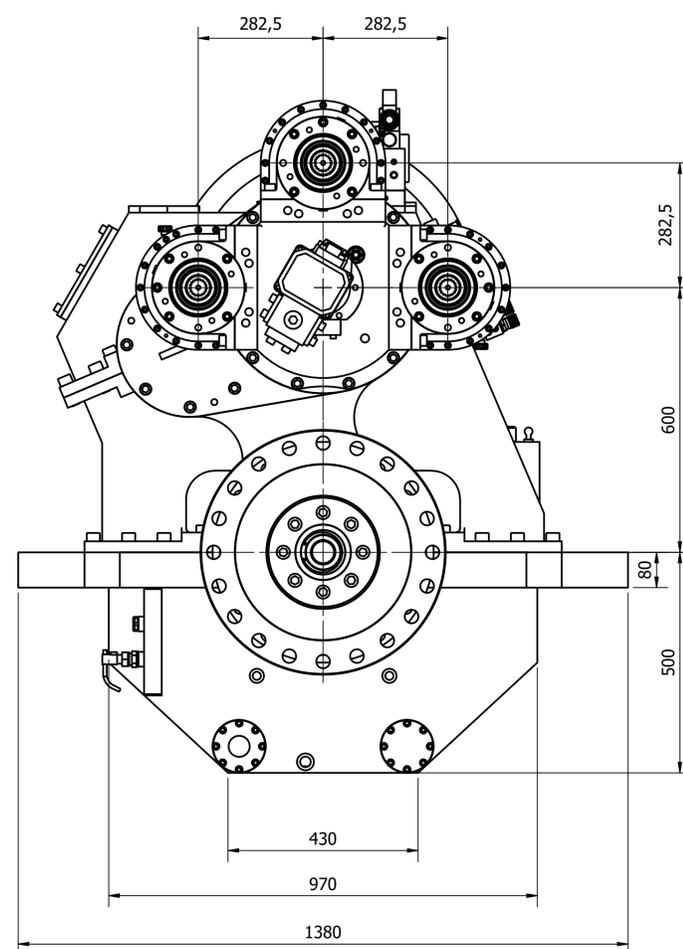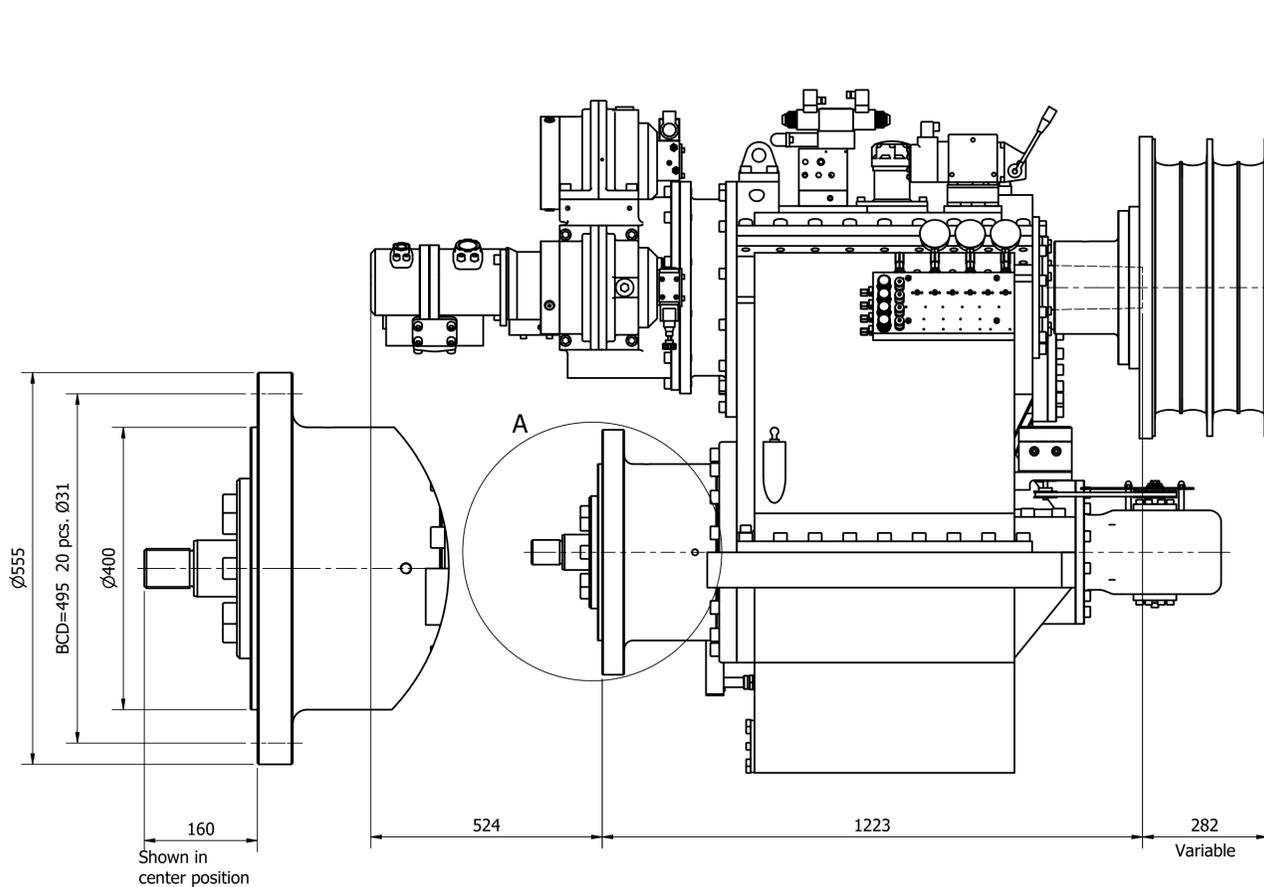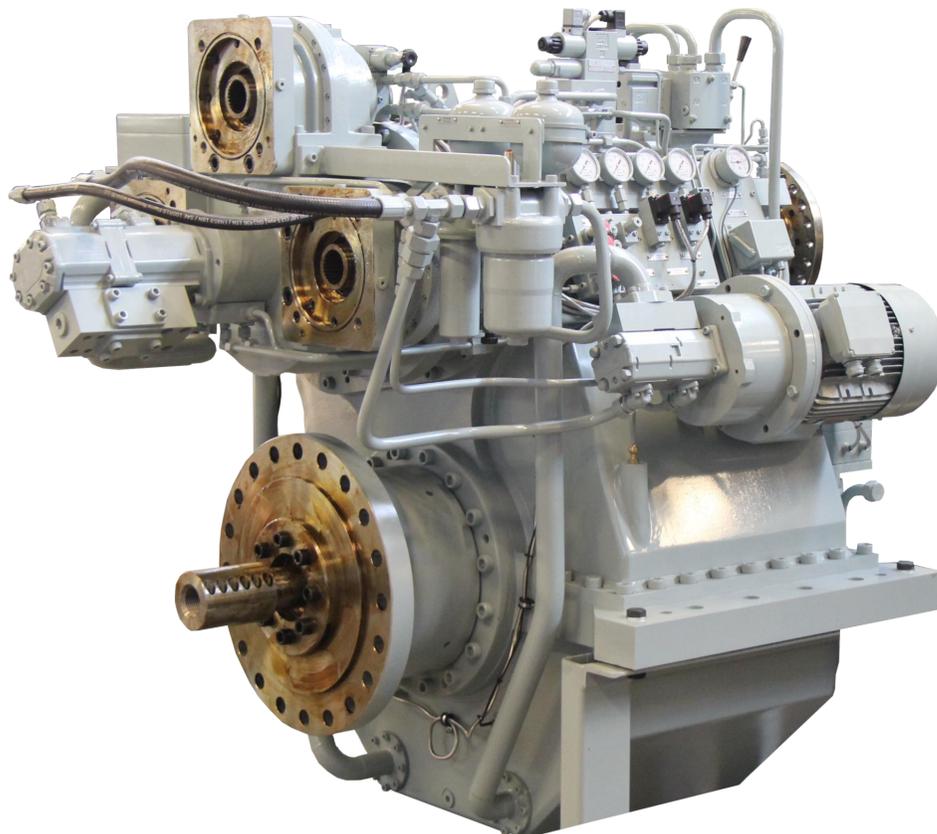

Servo for propeller:

- Max. force: 51,2t
- Max. stroke 200mm
- Suitable for feathering propeller

Options:

- Semi flexible foundation
- Semi flexible output coupling

PTO standard specifications:

- Max. 3 PTO's - each with hydraulic clutch or as live PTO.
- Max. torque f. 1 PTO: 2000Nm
- Max. total torque: 6000Nm
- Rpm speed-up ratio: 1,69:1
- SAE-C / SAE-D / SAE-E flange
- other PTO & flanges available on request

Weight (Approx.):

- Weight without PTO: 4000kg
- Weight with 3 PTO's: 4200kg

Direction of rotation:

- Double step gearbox
- Standard left in / left out



1-048-032188-0

HUNDESTED PROPPELLER A/s

E-mail: sales@hundested.com