

# DATA SHEET




## MARINEGEAR CPGD80



With safety according to class

Gear ratios	Torque [Nm]	J-Factor [kW/rpm]	J-Factor [HP/rpm]
6,182 : 1	6470	0,68	0,92
6,674 : 1	5990	0,63	0,85
7,477 : 1	5340	0,56	0,76
8,555 : 1	4670	0,49	0,66
9,160 : 1	4360	0,62	0,62
10,200 : 1	3920	0,41	0,56
10,790 : 1	3700	0,39	0,53
11,420 : 1	3500	0,37	0,50
12,120 : 1	3300	0,35	0,47

OTHER RATIOS AVAILABLE ON REQUEST

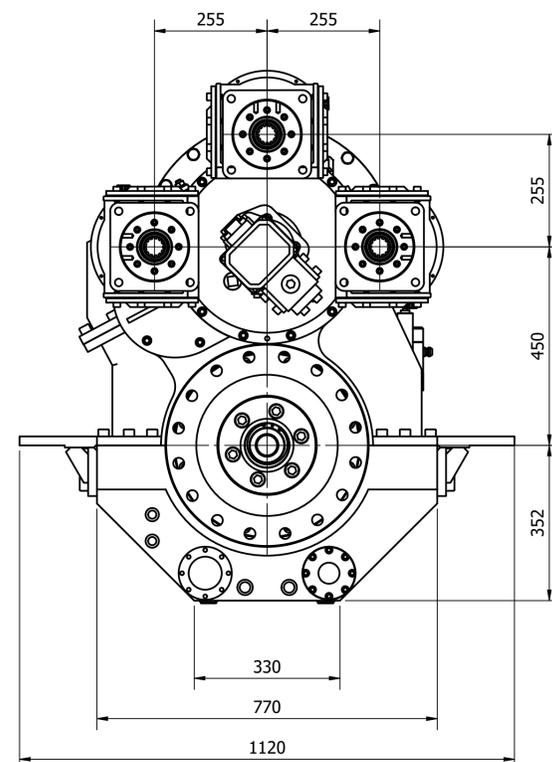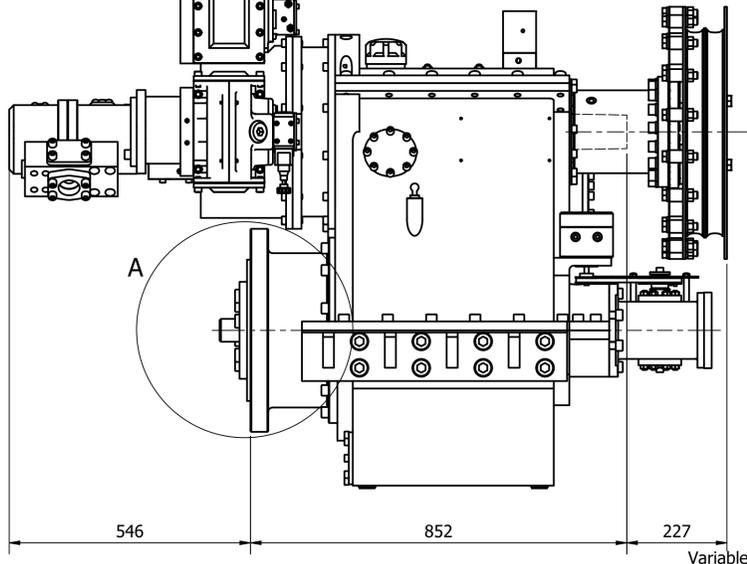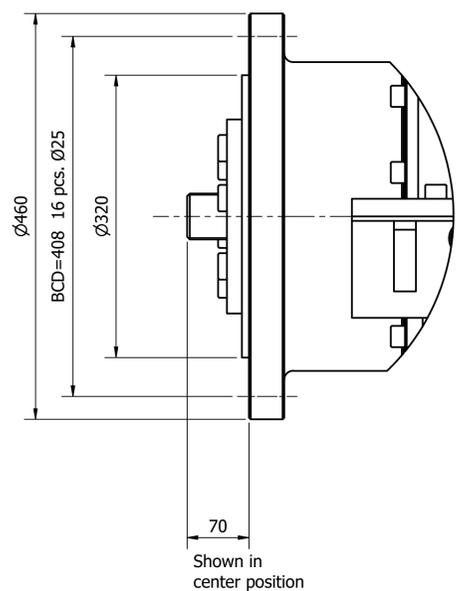

- Servo for propeller:
- Max. force: 45,6t
  - Max. stroke 145mm
  - Suitable for feathering propeller

- Options:
- Semi flexible foundation
  - Semi flexible output coupling

- PTO standard specifications:
- Max. 3 PTO's - each with hydraulic clutch or as live PTO.
  - Max. torque f. 1 PTO: 1300Nm
  - Max. total torque: 4000Nm
  - Rpm speed-up ratio: 1,22:1
  - SAE-C / SAE-D / SAE-E flange
  - other PTO & flanges available on request

- Weight (Approx.):
- Weight without PTO: 1950kg
  - Weight with 3 PTO's: 2030kg

- Direction of rotation:
- Double step gearbox
  - Standard left in / left out



1-048-032177-0

**HUNDESTED PROPELLER A/s**

E-mail: sales@hundested.com